


CELANO V2™



FP8062** 52" Ceiling Fan

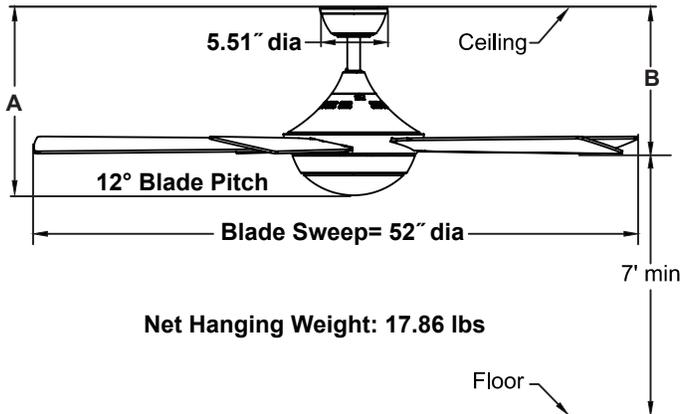

	A	B
Fan w/4.5" downrod	14.71"	11.10"
Fan w/12" downrod	22.21"	18.60"
Fan w/18" downrod	28.21"	24.60"
Fan w/24" downrod	34.21"	30.60"
Fan w/36" downrod	46.21"	42.60"
Fan w/48" downrod	58.21"	54.60"
Fan w/60" downrod	70.21"	66.60"
Fan w/72" downrod	82.21"	78.60"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 17 AC motor is designed for optimal performance with this fan.

BLADES:

A set of five 22.5" plywood blades is included.

LIGHTING OPTIONS:

One 18-watt dimmable LED included.

CONTROL OPTIONS:

BTT9 bluetooth hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. The reverse switch is located on the top housing. Optional CW1SW, CW2 and CW60WH wall controls are available— sold separately. Instructions are provided with each control.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCK1-52) are available for slope angles greater than 19° and up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

Available Finish	
BN	Brushed Nickel with reversible Cherry/Dark Walnut Blade and Opal Frosted glass
DZ	Dark Bronze with reversible Cherry/Dark Walnut Blade and Opal Frosted glass
MW	Matte White with Matte White Blade and Opal Frosted glass

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	174	5596	93	0.51	60
Med	106	3525	139	0.33	25
Low	53	1896	203	0.20	9

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1350	3000	80%